

USER MANUAL
V.35 / FastEthernet Interface Converter
TAHOE 285

TAHOE
FREEDOM OF COMMUNICATION

1. Introduction


Tahoe® 285 converter allows connecting of two LANs through a line terminated with V.35 interfaces.

Converters work as transparent bridges, that is both interconnected networks appear as a single LAN, as if both were plugged into the same Ethernet switch.

Converter automatically learns, which Ethernet addresses are heard on one and which on the other side. As a result local traffic is not sent through the WAN link - converter discovers packets destined for the other LAN and only those are directed to the V.35 interface.

2. Interfaces

2

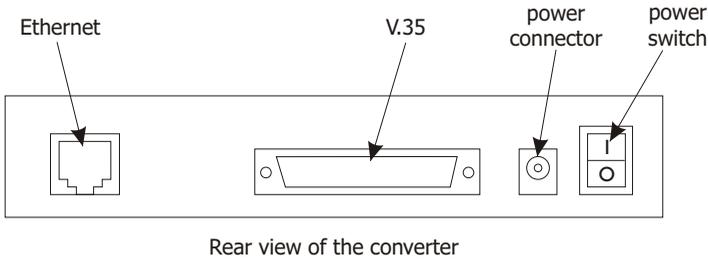

2.1. V.35 Interface

2.1

The V.35 interface is equipped with DB-25 connector. A V.35 cable terminated with 34-pin male (DTE) Winchester connector should be connected here, so the converter could be connected to a DCE device, like a V.35 modem.

2.2. Ethernet Interface

2.2

The Ethernet interface is used to connect the converter to the LAN. It may work at 10 or 100 Mbps and in either half or full duplex mode. The choice between these modes is done automatically.

Converter should be connected to a switch using a straight patch-cord and to a PC or a router using a cross-over patch-cord.

3. Status LEDs

3

On the front panel there are four LEDs indicating device status:

- **WAN Act** - blinks to signal the activity of the V.35 port
- **LAN Link** - when lit, indicates proper Ethernet connection between the converter and the switch or other device
- **LAN 100M** - when lit, indicates successful negotiation of 100 Mbps transfer rate on the Ethernet port
- **LAN Act** - blinks to signal the activity of the Ethernet port

4. Technical Data

- processor:
ARM
- memory:
8 MB SDRAM
- MAC table size:
10 000 entries, automatic entry removal after 30s
- dimensions:
200 mm (width) x 130 mm (length) x 45 mm (height)
- power supply:
15V, 400mA
external power supply included
- environmental conditions:

storage:	temperature	-20°C to 65°C
	humidity	5 to 95%
operation:	temperature	0°C to 50°C
	humidity	0 to 85%



TAHOE
Piotr Kaczmarzyk
ul. Uniwersytecka 1
50-951 Wrocław, Poland

We declare that the product Tahoe 285 complies with the regulations of the following European Directives:

- **73/23/EEC** low voltage safety requirements
- **89/336/EEC** EMC requirements
- **99/5/EEC** radio & telecommunication terminal equipment requirements

The compliance of Tahoe 285 with the requirements of the above mentioned directives is ensured by complete application of the following harmonized European Standards:

- **EN 60950:2000**
- **EN 55022:1998**
- **EN 61000-6-1:2002**
- **EN 61000-6-3:2002**

Signed: Piotr Kaczmarzyk
Position: Director

Signature: 

Date: 2 Feb 2004
Place: Wrocław, Poland

TAHOE®
Uniwersytecka 1
50951 Wrocław, Poland
phone +48 50 100 7362
fax +48 71 344 2642
<http://www.tahoe-group.com/>